

Single Handle Lavatory Faucet
Model: SHLF-26




1
Remove the Mounting Hardware

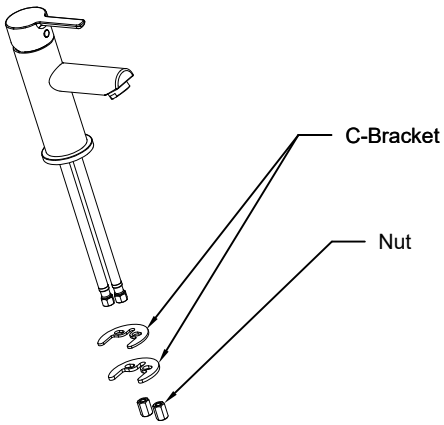


Remove the nuts and C-brackets from the mounting studs.

2
Position the Faucet

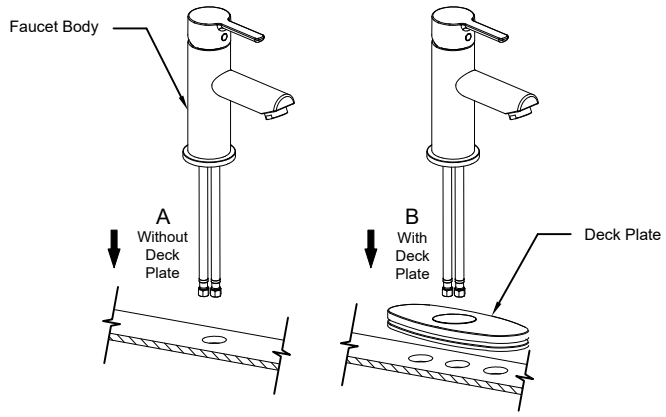


Without Deck Plate: Insert the faucet through the mounting hole.
With Deck Plate: Place the deck plate over the holes, then insert the faucet. Apply silicone if needed.

3
Secure the Faucet

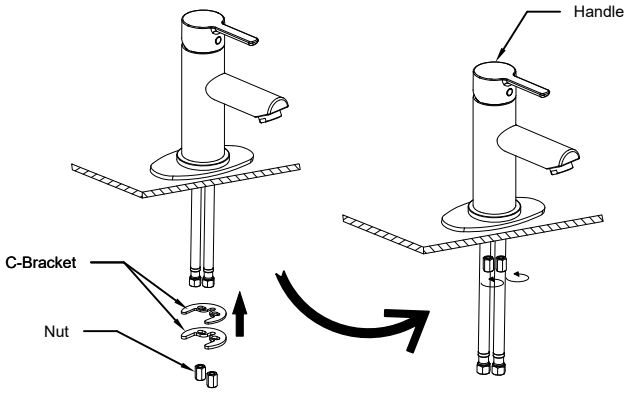

From below, slide the C-brackets onto the studs and tighten the nuts. Align the handle forward. **Do not overtighten.**


4
Flush the Supply Stops

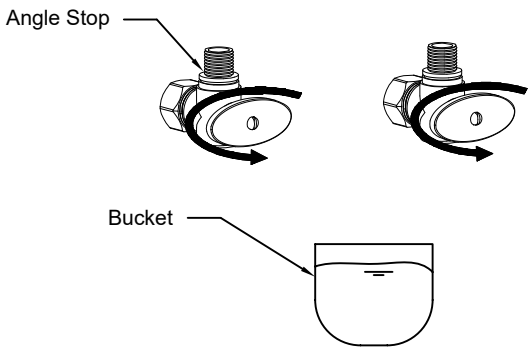

Open each angle stop and flush water into a bucket for 15 seconds to remove any debris.


1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR

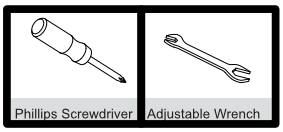

5


Connect the Supply Lines

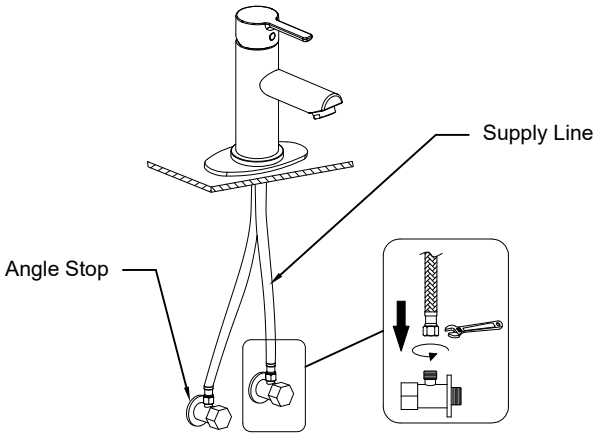

Hand-thread each supply line onto its angle stop. Tighten both ends with an adjustable wrench.

6


Check for Leaks

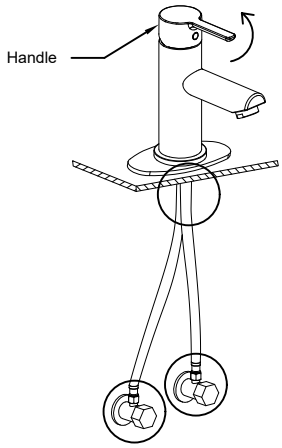

Open both angle stops and run the faucet for one minute. Check all connections and tighten if needed.

7

Flush the Faucet

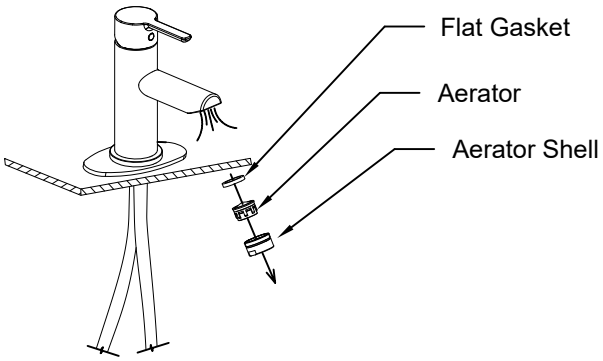

Remove the aerator from the spout. Run hot and cold water for 30 seconds, then reinstall the aerator.

1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR