

# Single Handle Lavatory Faucet
Model: SHLF-30





## 1
### Remove the Mounting Hardware

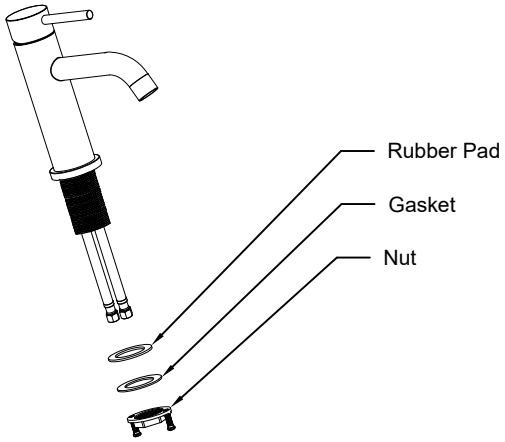



Slide the nut, gasket and rubber pad off the threaded shank.

## 2
### Position the Faucet

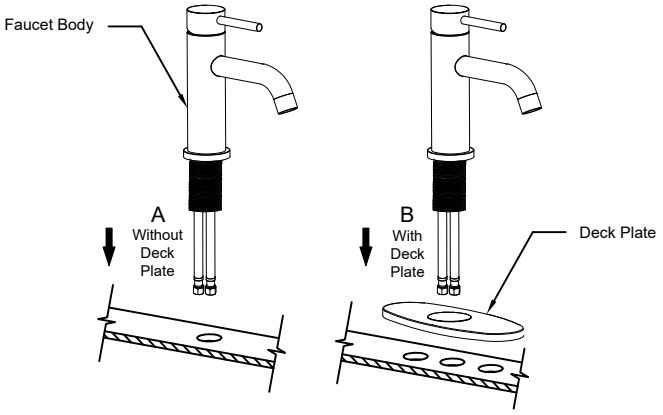



**Without Deck Plate:** Insert the faucet through the mounting hole.
**With Deck Plate:** Place the deck plate over the holes, then insert the faucet. Apply silicone if needed.

## 3
### Secure the Faucet

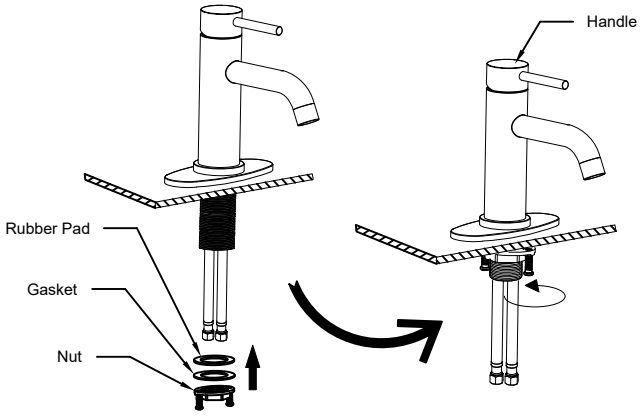


From below, install the rubber pad, gasket, and nut. Align the handle forward, then tighten the nut and screws.
**Do not overtighten**.


## 4
### Flush the Supply Stops

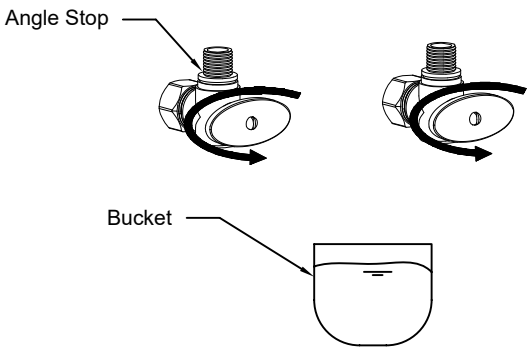


Open each angle stop and flush water into a bucket for 15 seconds to remove any debris.


1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR




## 5


### Connect the Supply Lines

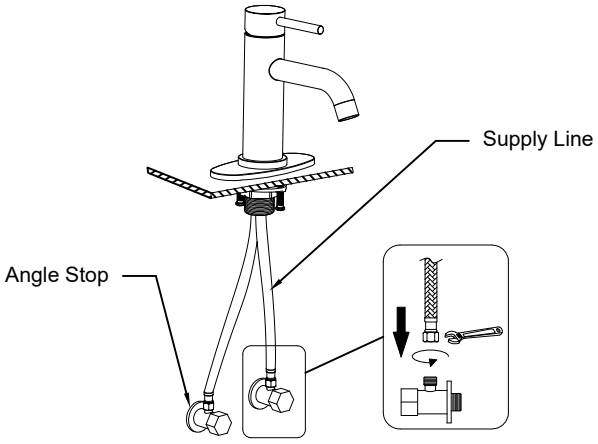


Hand-thread each supply line onto its angle stop. Tighten both ends with an adjustable wrench.

## 6


### Check for Leaks

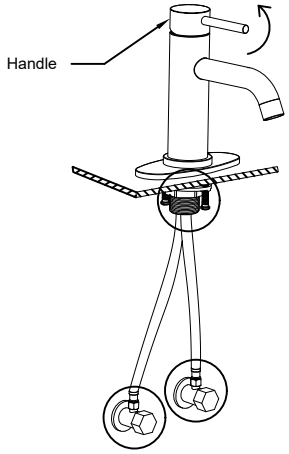


Open both angle stops and run the faucet for one minute. Check all connections and tighten if needed.

## 7

### Flush the Faucet

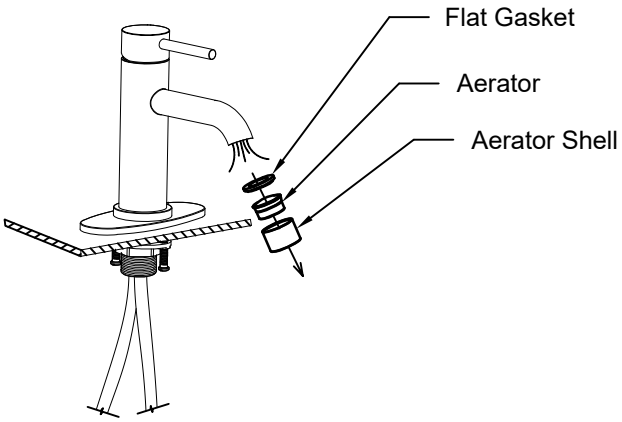


Remove the aerator from the spout. Run hot and cold water for 30 seconds, then reinstall the aerator.

1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR