Single Handle Lavatory Faucet

Model: SHPDKF-27

FLOW RATE:

1.8 GPM (6.8/Lmin) @ 60 PSI

Overall Height

15-1/2”

Standards

CUPC
NSF/ANSI/CAN 61-2023
NSF/ANSI/CAN 372-2022




1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR

Single Handle Pull-Down Kitchen Faucet

Model: SHPDKF-27

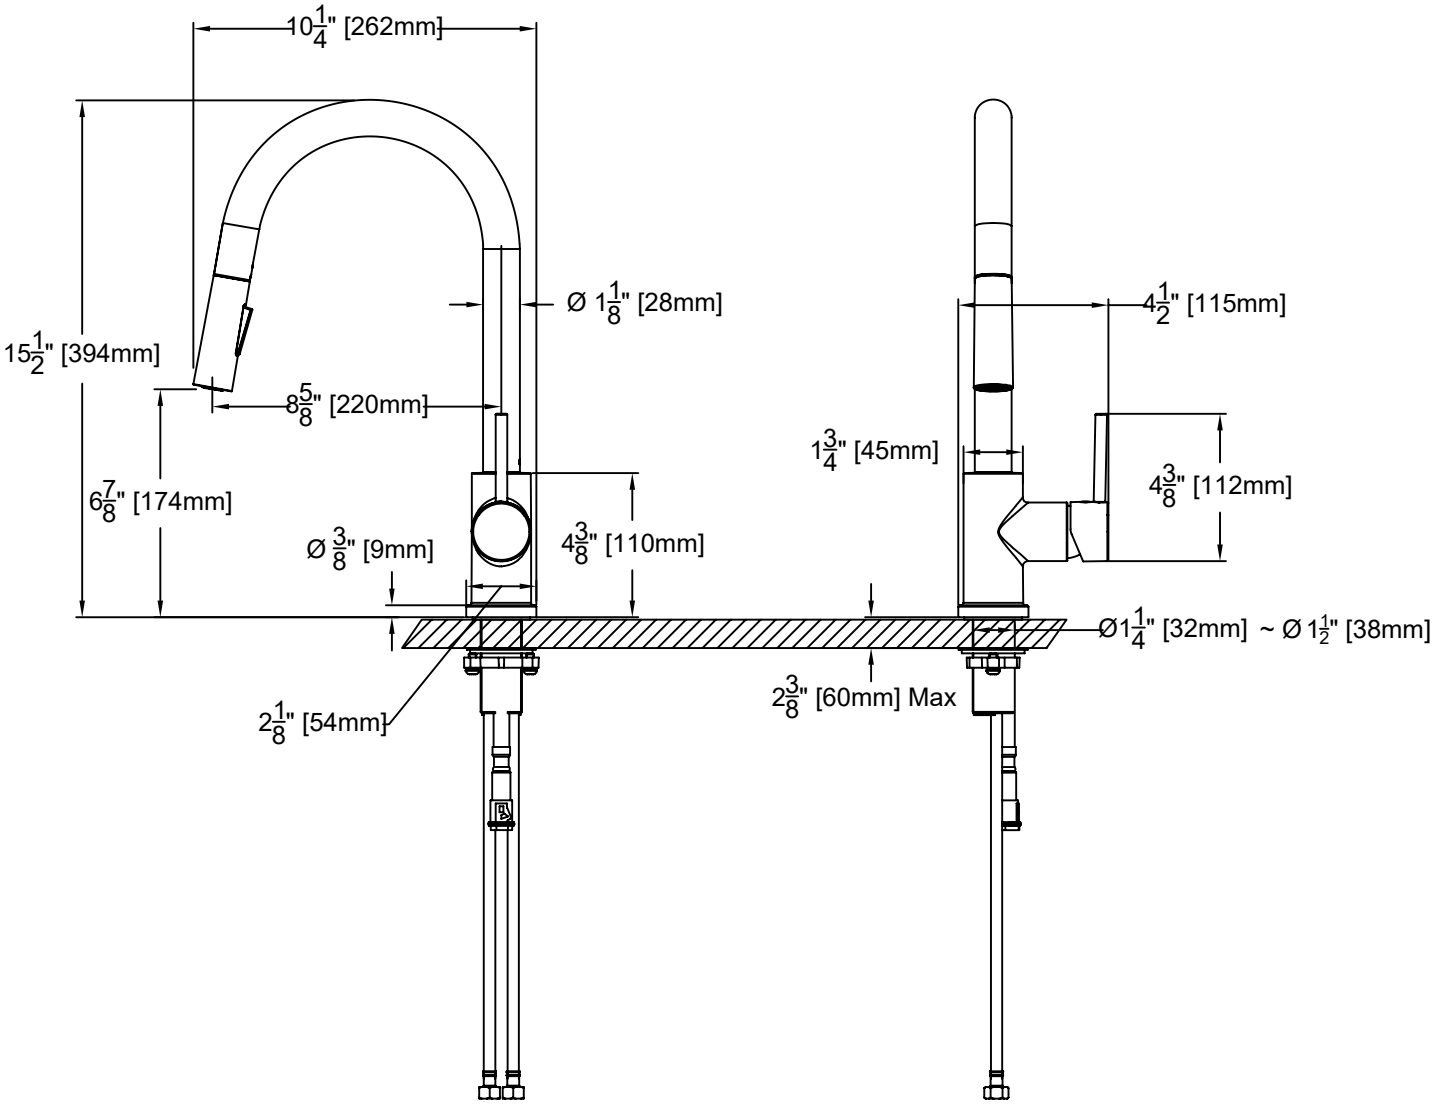


1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR

Single Handle Pull-Down Kitchen Faucet

Model: SHPDKF-27

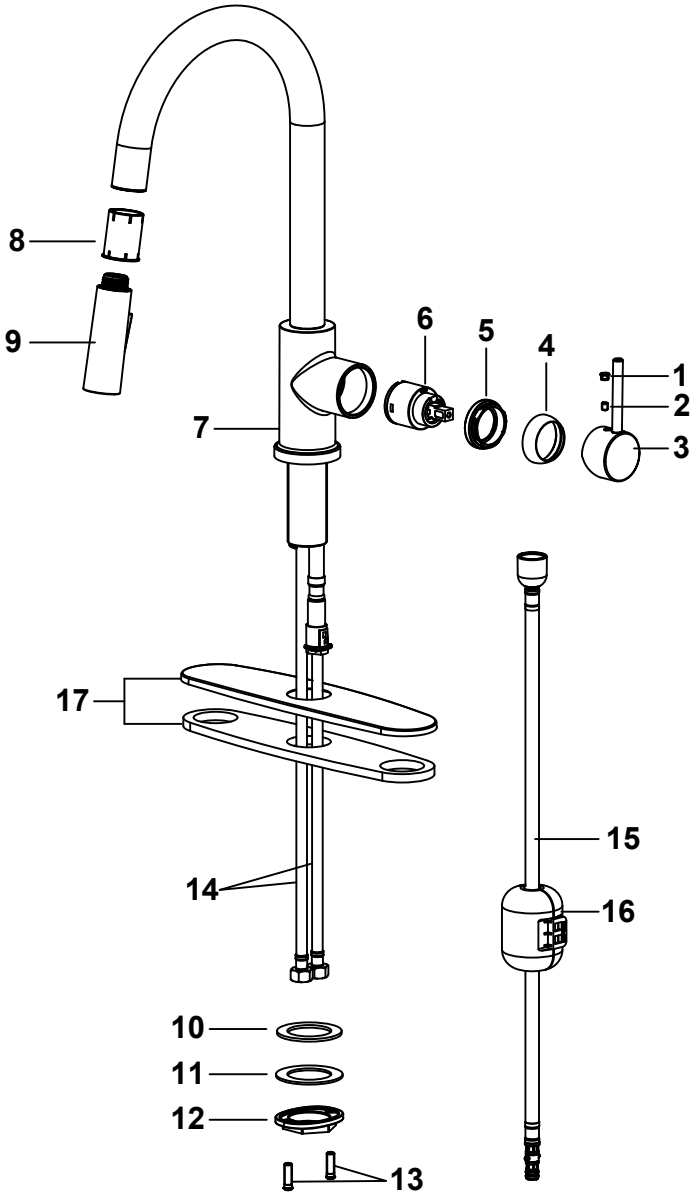


No	Description
1	Button
2	Hexagon Screw
3	Handle
4	Decorative Cup
5	Cartridge Cover
6	Cartridge
7	Faucet Body
8	Plastic Sleeve
9	Spray Head
10	Rubber Pad
11	Gasket
12	Nut
13	Mounting Screw (x2)
14	Water Supply Line (x2)
15	Spray Hose
16	Counterweight
17	Deck Plate

1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR


Single Handle Pull-Down Kitchen Faucet

Model: SHPDKF-27



1


Remove the Mounting Hardware

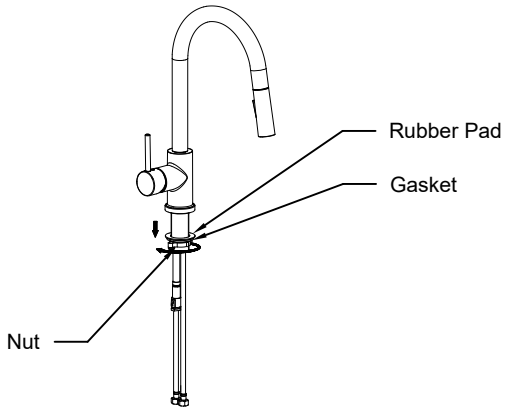

Slide the nut, gasket and rubber pad off the shank.

2


Position the Faucet

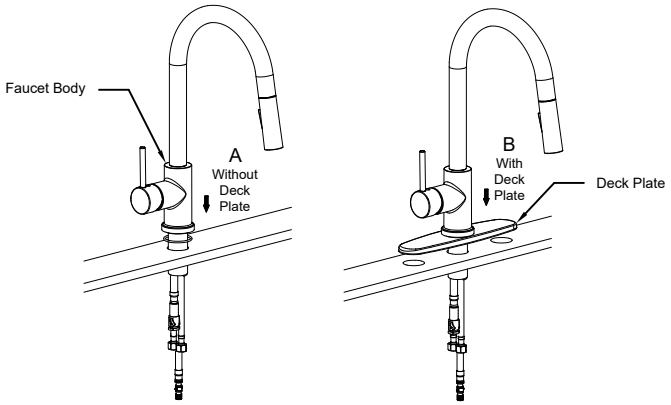

Without Deck Plate: Insert the faucet through the mounting hole.
With Deck Plate: Place the deck plate over the holes, then insert the faucet. Apply silicone if needed.

3


Secure the Faucet

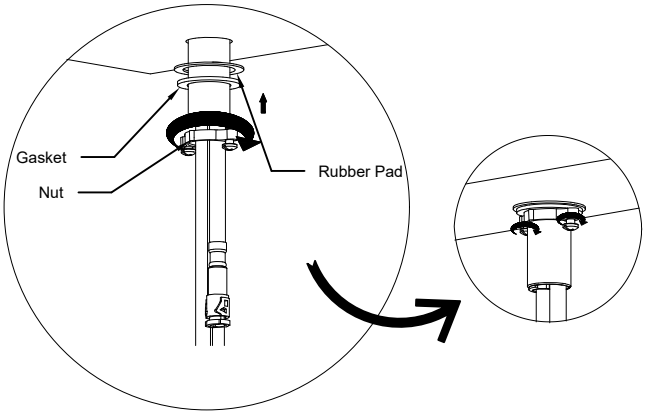

From below, install the rubber pad, gasket, and nut. Align the faucet, then tighten the nut and screws.
Do not overtighten.

4


Flush the Supply Stops

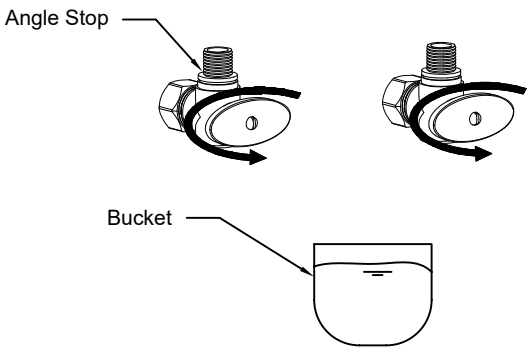

Open each angle stop and flush water into a bucket for 15 seconds to remove any debris.


1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR



5


Connect the Supply Lines

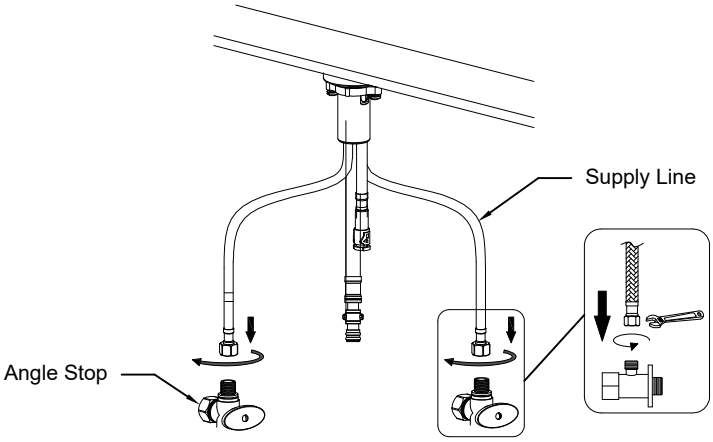

Hand-thread each supply line onto its angle stop. Tighten both ends with an adjustable wrench.

6


Connect the Spray Hose

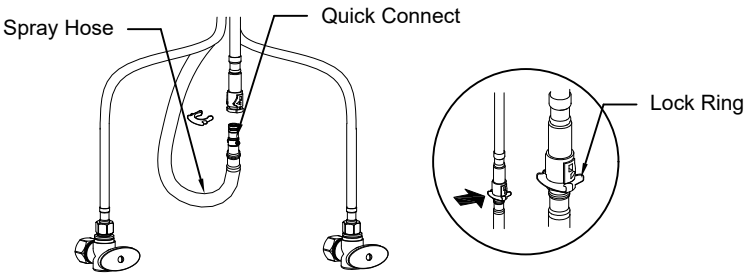

Push the spray hose into the quick connect until it clicks, then snap the lock ring into the groove.

7


Attach the Counterweight

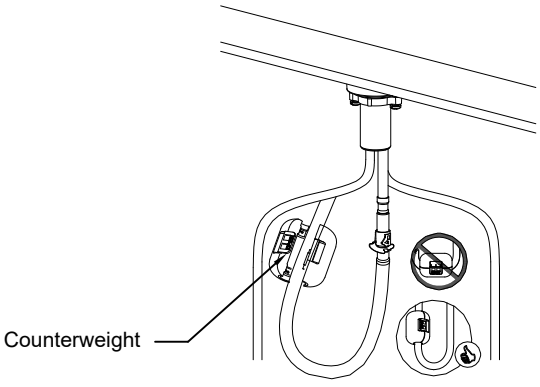

Clamp the counterweight onto the hose, 6 inches above the bottom of the loop.

8

Flush the Faucet

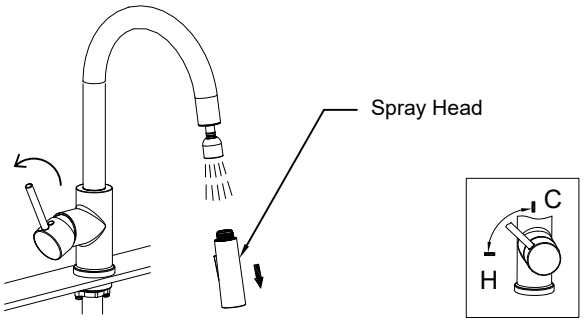


Remove the spray head from the hose. Run hot and cold water for 30 seconds, then reattach the spray head.

1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR

Single Handle Pull-Down Kitchen Faucet

Model: SHPDKF-27

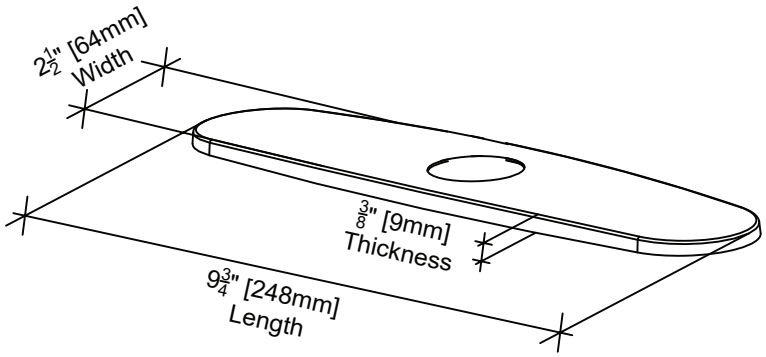

1274 49th St. Suite 217, Brooklyn, NY 11219
www.vasear.com
info@vasear.com

VASEAR